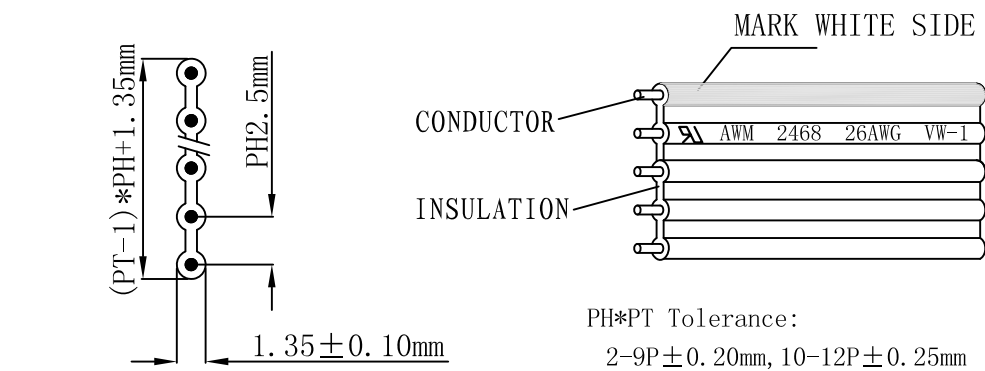


# SPECIFICATION

Style number:	UL2468	Document Number	Made Date	Rev.
Specification:	26AWGxPH2.50	WCH19080105	2019-08-01	1.0V
Cross Section	 <p style="text-align: right;">PH*PT Tolerance:                  2-9P ± 0.20mm, 10-12P ± 0.25mm</p>			
<b>Technical Parameters</b>				
Conductor	Conductor Gauge	(AWG)	26	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS7/0.16±0.007	
Insulation	Average Thickness	(mm)	0.41	
	Minimum Thickness	(mm)	0.33	
	Over Diameter	(mm)	1.35±0.10	
	Pitch Distance	(mm)	2.50	
	Width	(mm)	N*2.50±0.30	
	Minimum Pins Quantity		2 Pins	
	Maximum Pins Quantity		12 Pins	
	Material		40P PVC (RoHS)	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	150	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Physical Characters	Flame Test		VW-1, FT1	
Marking	As per standard of UL2468			