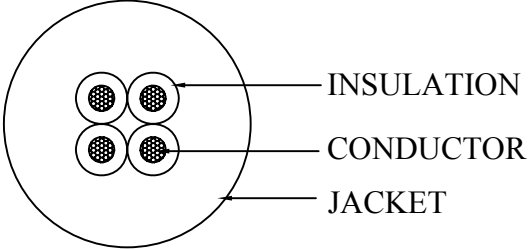


Style No.:	UL2517	Specification:	18AWGX4C	Structure Figure	
<b>Item</b>		<b>Parameter</b>			
Conductor	Gauge	18AWG			
	Material	Tinned Stranded Copper			
	Conductor Structure	TS34/0.178±0.007mm			
Insulation	Average Thickness	0.43mm			
	Minimum Thickness	0.36mm			
	Material	PVC			
	Diameter	2.10±0.10mm			
	No.	4C			
Assembly	Filler	/			
	Drain Wire	/			
	Aluminum Foil	/			
Braid Shield	Material	/		<b>Colour Code</b>	
	Coverage	/		Black, Red, Brown, Orange	
	Overlap	/			
Jacket	Average Thickness	0.86mm		<b>Marking</b>	
	Minimum Thickness	0.69mm		UL AWM 2517 18AWG VW-1 105°C 300V ...	
	Material	PVC		CUL AWM 18AWG I/II A FT1 105°C 300V ...	
	Colour	Black			
	Overall Diameter	6.80±0.30mm			
<b>Electrical Characteristics</b>		<b>Physical Properties of Jacket</b>		<p align="center"><b>WCH CABLE INDUSTRIAL CO., LTD.</b>  (86) 769-88649806   sales@wchcable.com</p>	
1. Rated Voltage: 300V 2. Conductor Resistance: 23.2Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 105°C.			