
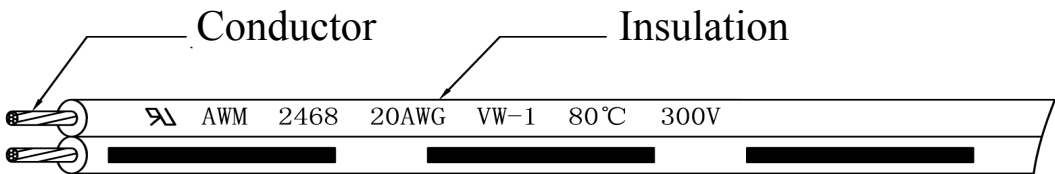


SPECIFICATION

Style number:	UL2468	Document Number	Made Date	Rev.
Specification:	20AWGx2P	WCH13032101	2013-03-21	1.0V
Cross Section				
Technical Parameters				
Conductor	Conductor Gauge (AWG)	20		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS21/0.178±0.007		
Insulation	Average Thickness (mm)	0.40		
	Minimum Thickness (mm)	0.35		
	Over Diameter (mm)	1.80±0.15*3.60±0.20		
	Pitch Distance (mm)	1.80		
	Width (mm)	3.60±0.20		
	Minimum Pins Quantity	2 Pins		
	Maximum Pins Quantity	2 Pins		
	Material	52P PVC (RoHS)		
	Colour	Black + Gray Mark(1C)		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	36.7		
	Insulation Resistance (MΩ/KM 20°C)	10		
Physical Characters	Flame Test	VW-1, FT1		
Marking	As per standard of UL2468			

Prepared by: sales@wchcable.com

Approved by:



www.wchcable.com