


SPECIFICATION

Style number:	UL2468	Document Number	Made Date	Rev.
Specification:	24AWGxPH2.54	WCH13041906	2013-04-19	1.0V

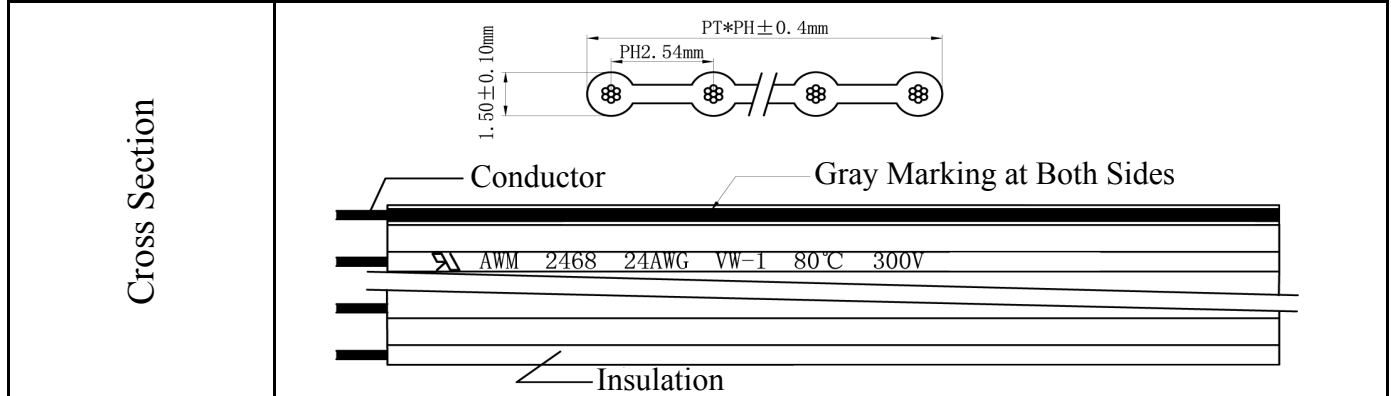

Technical Parameters

Conductor	Conductor Gauge (AWG)	24
	Material	Tinned Stranded Copper
	Configuration (mm)	TC7/0.20±0.007
Insulation	Average Thickness (mm)	0.42
	Minimum Thickness (mm)	0.35
	Over Diameter (mm)	1.50±0.10
	Pitch Distance (mm)	2.54
	Width (mm)	N*2.54±0.40
	Minimum Pins Quantity	2 Pins
	Maximum Pins Quantity	12 Pins
	Material	40P PVC (RoHS)
Colour	Black + Gray (1P)	
Electrical Capability	Rated Temperature (°C)	80
	Rated Voltage (V)	300
	Conductor Resistance (Ω/KM 20°C)	94.2
	Insulation Resistance (MΩ/KM 20°C)	10
Physical Characters	Flame Test	VW-1, FT1
Marking	As per standard of UL2468	

