


SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	24AWGx2PR	WCH16012305	2016/01/23	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification (AWG)	24		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS11/0.16±0.007		
Insulation	Average Thickness (mm)	0.23		
	Minimum Thickness (mm)	0.19		
	Over Diameter (mm)	1.10±0.10		
	Material	SR-PVC (RoHS)		
	Colour	1P: Black-Brown; 2P: Red-Orange		
Assembly	FILLER	--		
	Cotton Papper (mm)	--		
Jacket	Average Thickness (mm)	0.78		
	Minimum Thickness (mm)	0.62		
	Over Diameter (mm)	5.30±0.20		
	Material	PVC (RoHS)		
	Colour	Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	94.2		
	Insulation Resistance (MΩ/KM 20°C)	10		
Marking	As per standard of UL2464			

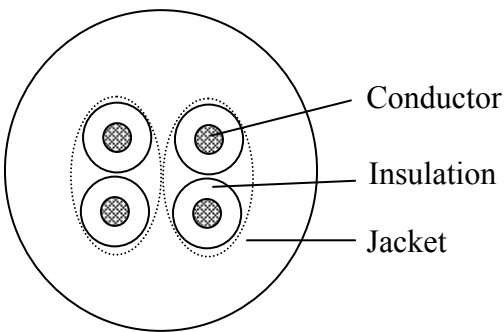