


# SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	26AWGx10C+AL	WCH16102304	2016/10/23	1.0V
Cross Section	 <p style="text-align: right; margin-right: 50px;">       Aluminum Foil        Conductor        Insulation        Jacket     </p>			
<b>Technical Parameters</b>				
Conductor	Specification	(AWG)	26	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS7/0.16±0.007	
Insulation	Average Thickness	(mm)	0.22	
	Minimum Thickness	(mm)	0.19	
	Over Diameter	(mm)	0.95±0.08	
	Material		SR-PVC (RoHS)	
	Colour		TBD	
Assembly	Screened Shield		One Side Aluminum Foil	
	Cotton Paper	(mm)	--	
Jacket	Average Thickness	(mm)	0.80	
	Minimum Thickness	(mm)	0.64	
	Over Diameter	(mm)	5.50±0.30	
	Material		PVC (RoHS)	
	Colour		Gray	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	150	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Marking	As per standard of UL2464			

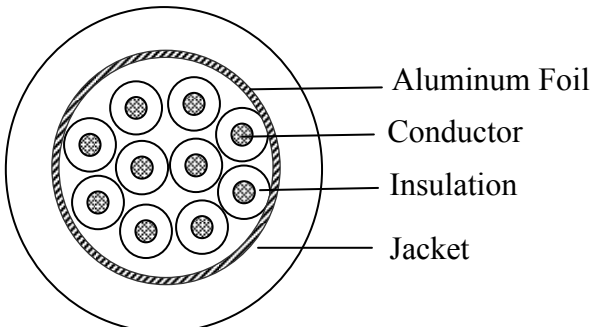